Panasonic

Welding Machine Robot Laser Welding System Full Digital Controlled Plasma Cutting Machine

YP-060/100PF

Full Digital Controlled Cutting Machine

The cutting performance is significantly improved by full digital control technology.

High-quality cutting results can be effortlessly achieved by using the unique cutting navigation function.

New arrival cutting torch offers you high accuracy operation and long using life








Panasonic pursues Only one in cutting technology

■ Rated Specifications

Туре		YP-060PF3	YP-100PF3		
Rated input voltage	V	AC380(±20%)			
No. of phases	-	3	3		
Rated frequency	Hz	50	/60		
Rated input	kVA	9.81(Cutting) /11.32(Gouging)	17.67(Cutting) /19.82(Gouging)		
Rateu IIIput	kW	7.27(Cutting) /8.48(Gouging)	13.87(Cutting) /15.95(Gouging)		
Maximum no-load voltage	V	295	300		
Rated output current	Α	60	100		
Rated output voltage	out voltage V 104(Cutting) 124(Gouging)		120(Cutting) 140(Gouging)		
Rated duty cycle	%	100	60		
Output current	Α	15 ~ 60	15 ~ 100		
Control process	-	IGBT I	nverter		
Power source cooling method	-	Forced	cooling		
Enclosure protection Class	-	IP2	?1S		
Insulation grade	-	Main transformer130°C(Reactor 180°C)			
Electromagnetic compatibility classification	-	А			
Dimension(W×D×H)	mm	290 × 606 × 559			
Weight	kg	43 48			

*Note: The output ranges are tested on the conditions of resistance load according to GB15579.1-2013.

Connecting Diagram

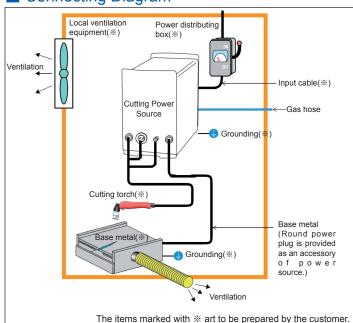

Cutting Thickness

Thickness (mm)	60PF(mm)		100PF(mm)		
(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Contact Non-contact		Contact	Non-contact	
Carbon steel	12	12 36		40	
Stainless steel	12	35	12	40	
Aluminum	10	20	10	30	
Copper	5	8	6	10	

■ Power Capacity and Connecting Cables

	. ,				
Cutting Power Source		YP-060PF3	YP-100PF3		
Input power		AC 3 phase 380 V			
The server sleet	Grid power	Over 15 kVA	Over 25 kVA		
The power plant capacity	Generator	Over 11.32kVA twice capacity	Over 19.82kVA twice capacity		
Input protection (Distributing Box)	Fuse	40 A	60 A		
	Circuit breaker	60 A			
	Power input side	Over 6 mm ²			
Electric cable	Power output side	Over 10 mm ²	Over 16 mm ²		
	Ground	≥the cross-section of the input cable			

Applicable Cutting Torch


Model	Rated Current	Shape	Cooling Method Length		Duty
YT-06PD3HAE	60	Angular	Air Cooling	10m	100%
YT-06PD3HAF	60	Angular	Air Cooling	20m	100%
YT-06PD3HAG	60	Angular	Air Cooling	30m	100%
YT-06PE3HAE	60	Pen-Type	Air Cooling	10m	100%
YT-06PE3HAF	60	Pen-Type	Air Cooling	20m	100%
YT-06PE3HAG	60	Pen-Type	Air Cooling	30m	100%
YT-10PD3HAE	100A	Angular	Air Cooling	10m	60%
YT-10PD3HAF	100A	Angular	Air Cooling	20m	60%
YT-10PD3HAG	100A	Angular	Air Cooling	30m	60%
YT-10PE3HAE	100A	Pen-Type	Air Cooling	10m	60%
YT-10PE3HAF	100A	Pen-Type	Air Cooling	20m	60%
YT-10PE3HAG	100A	Pen-Type	Air Cooling	30m	60%

■ Electrode and Cutting Nozzle

Short	Short cutting nozzle	TE	ET01110 / TET01310 / TET01512 / TSM06626
Short Short Electrode		-	TET02033
Lana	Long cutting nozzle		TET01114 / TET01313 / TET01513
Long	Long Electrode		TET02040
Gouging nozzle			TET02502 (for use with electrode TET02033)

The cutting and piercing capacities for carbon steel.

Model	Set cutting current		Recommended piercing thickness (No-contact)	
YP-060PF	60A (Max.)	≤12mm	≤12mm	
YP-100PF	100A (Max.)	≤25mm	≤16mm	



Safety precautions Before attempting to use any cutting product, always read the manual to ensure correct use.



Panasonic Welding Systems(Tangshan)Co.,Ltd.
Tel: (0315) 3206066 3206060 Fax: (0315) 3206018
Service hotline: (0315) 3206016 4006125816 Technique consulting: (0315)3206012 Website: http://pwst.panasonic.cn E-mail:sales@tsmi.cn

The color is subject to be different to the real product. The specifications are subject to change without notice Advertiser: Panasonic Welding Systems (Tangshan) Co.,Ltd.
Address: No.9 Qingnan Road, New & Hi-tech Development Zone,Tangshan, Hebei, China
Printed by Tangshan October Printing Co.,Ltd.
Address:No.2 Tanggu Road, Tangshan, Hebei, China

Printed in Jun 2016

Printed in Jun.2016




Full Digital Controlled Plasma Cutting Machine

The cutting performance is further geared up: high arc start successful rate, fast cutting speed, high verticality and fine smoothness of cut surface, less amount of slag adhering on the surface and small deformation even for the thin plate.

Much Better Cutting Performance

■The comparison on cutting performance

The new-type cutting torch powered by full digital machine offers you high-level of cutting solution.

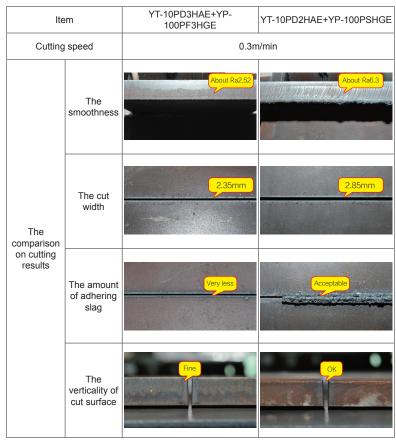


The Long-lasting Plasma Arc Cutting Torch


■Enhanced operability and durability



Higher precision cutting tip with prolonged life span

The comparison on the consumption





Number of cuts

the rated cutting current specified on the panel.

Equipped with Torch Protection Function

The output current of the machine can be limited within

■ Compared with conventional arc air gouging, the noise level reduces over 10 dB and consumables fill can be saved.

Air Plasma Arc Gouging

Air plasma arc gouging can be easily realized by replacing the cutting nozzle with gouging nozzle.


The Gouging Result

···· oougg · toouit				
	Results	Width (mm)	Depth (mm)	
Carbon steel		10.4	5.3	
Aluminum		9.0	4.4	
Stainless steel		9.4	4.7	

By Using New Type Cutting Torch, Thin Plate can be Cut with No Difficulty.

■Thanks to less heat affected zone and deformation, YT-03PD3 cutting torch makes excellent cutting result come true.

Short cutting nozzle	TET00005	Long cutting nozzle	=	TET00003
Short electrode	TET00006	Long electrode		TET00004

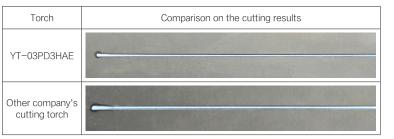

Easy-to-operate "Cutting Navigation Function"

The professional cutting parameter setting function makes more convenient, professional and personalized operations possible.

■The optimal cutting conditions can be set with ease



The cutting navigation c a n b e started by just pushing a button!

two layers for transportation and storage.

Machine can be stacked in

- Material Selection
 Turn the dial to pick up material (Carbon steel/SUS/Aluminum)
- 2. Thickness Selection
- 3. Manual/Auto Selection

Air Pressure Monitoring Function equipped

1.Digital display for easy fine adjustment

The self-draining air filter is provided.

2. Air pressure can be monitored

When air pressure exceeds the recommended range, the machine prompts a warning message which can be controlled by the operator.

确定

选择

■Digital control panel


1 Digital Display
2 Operation Lock
3 Air Pressure
Monitoring

- Cutting Torch LifeSpan MonitoringCutting Navigation
- 6 Specific Settings

Abundant Cutting Functions for Different Applications

1.Cutting coated steel plate

Cutting without removing coating



Caution! The harmful gas can be generated during cutting. Proper ventilation and safety appliance are highly recommended.

2.Pulse Cutting

Easy to cut thin plate



3.Piercing
Punch a hole on the thin plate can be realized.

